

SW-200

Cash Shrink Wrapping Machine

Automatic L-sealing with an oven shrink tunnel



The SW-200 is an automatic **shrink wrapping system** with L-sealing and an oven **shrink tunnel**, designed for the secure packaging of banknote bundles and packages in vaults, cash processing centers and financial institutions. The shrink film produces a firm, tidy, **tamper-evident** package, ideal for safeguarding and transporting valuables, with a **Daikin Teflon** non-stick coated steel sealing blade, PID temperature control and a Panasonic PLC with a 7" touch screen.

Features

- Fully automatic L-sealing
- Switchable automatic and manual modes
- 15 to 30 packages per minute
- Daikin Teflon coated blade
- No smoke, sticking or defective cuts
- Digital PID temperature control
- Panasonic PLC and 7" touch screen


- Photoelectric positioning sensor
- Adjustable mobile perforator (micro-perforated)
- Automatic film scrap recovery
- Film breakage alarm
- Adjustable film guide and conveyor
- Tunnel with adjustable belt and temperature
- Automatic blade protection
- POF/PE film up to 550 mm wide
- Sealing area of 550 × 450 mm



L-sealer



Full line with tunnel

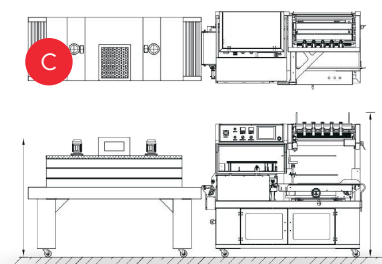

Dimensional drawing

Technical Specifications

Specification	Detail
Drive	Pneumatic — air cylinder (6 kgf/cm ²)
Speed	15-30 packages/min (by size)
Sealing area	550 × 450 mm
Max. package size	(L+H) < 500 mm; (W+H) < 430 mm; height < 130 mm
Film	POF/PE shrink film, up to 550 mm
Sealer power supply	AC 220 V single phase, 50/60 Hz
Sealer power	1.8 kW
Compressed air	6 kgf/cm ² (0.6 MPa)
Sealer dimensions	1,800 × 800 × 1,600 mm — 320 kg
Shrink tunnel	Included — 12 kW (220/380 V)
Belt speed	1-15 m/min adjustable
Tunnel mouth	1,500 × 450 × 220 mm
Conveyor load	30 kg
Tunnel dimensions	1,910 × 700 × 1,320 mm — 200 kg

